

# P1AD-29MF

RF Adapter, 2.92mm Male to 2.92mm Female, VSWR 1.25 max DC to 40 GHz.

## Product Features

P1dB's P1AD-29MF is a straight 2.92mm Male to 2.92mm Female adapter that operates to 40 GHz with a maximum VSWR of 1.25:1.

Material is passivated stainless steel.



Electrical Specification:  $T_{\text{Ambient}} = 25^{\circ}\text{C}$

| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|-----------|-----------------|-------|-----|---------|-----|-------|
| Impedance |                 |       |     | 50.0    |     |       |


## Mechanical And Environmental Specifications:

| Parameter       | Description   | Notes |
|-----------------|---------------|-------|
| Connector 1     | 2.92mm Male   |       |
| Connector 2     | 2.92mm Female |       |
| Orientation     | Straight      |       |
| Mount Type      | None          |       |
| RoHS Compliance | Yes           |       |

## Drawing

# P1AD-29MF

RF Adapter, 2.92mm Male to 2.92mm Female, VSWR 1.25 max DC to 40 GHz.

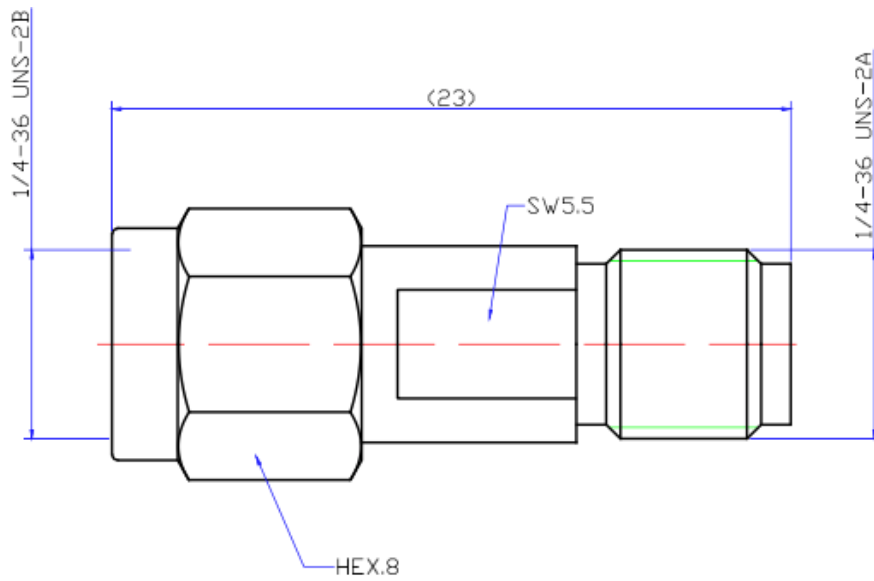

## Product Notes

-40 to +85 deg C operating temp range.