

P1AD-SAMMRA-27G

RF Adapter, SMA Male to SMA Male, mitered right angle. Frequency DC to 27 GHz,  
VSWR 1.2 max.

Product Features

P1AD-SAMMRA-27G is a precision RF Adapter, SMA Male to SMA Male, mitered right angle.

Frequency DC to 27 GHz, VSWR 1.2 max.

Material is passivated stainless steel.



Electrical Specification: T<sub>Ambient</sub> = 25° C

| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|-----------|-----------------|-------|-----|---------|-----|-------|
| Impedance |                 |       |     | 50.0    |     |       |


Mechanical And Environmental Specifications:

| Parameter       | Description                | Notes |
|-----------------|----------------------------|-------|
| Connector 1     | SMA Male                   |       |
| Connector 2     | SMA Male                   |       |
| Orientation     | Angle: Mitered Right Angle |       |
| RoHS Compliance | Yes                        |       |

Drawing

## P1AD-SAMMRA-27G

RF Adapter, SMA Male to SMA Male, mitered right angle. Frequency DC to 27 GHz,  
VSWR 1.2 max.

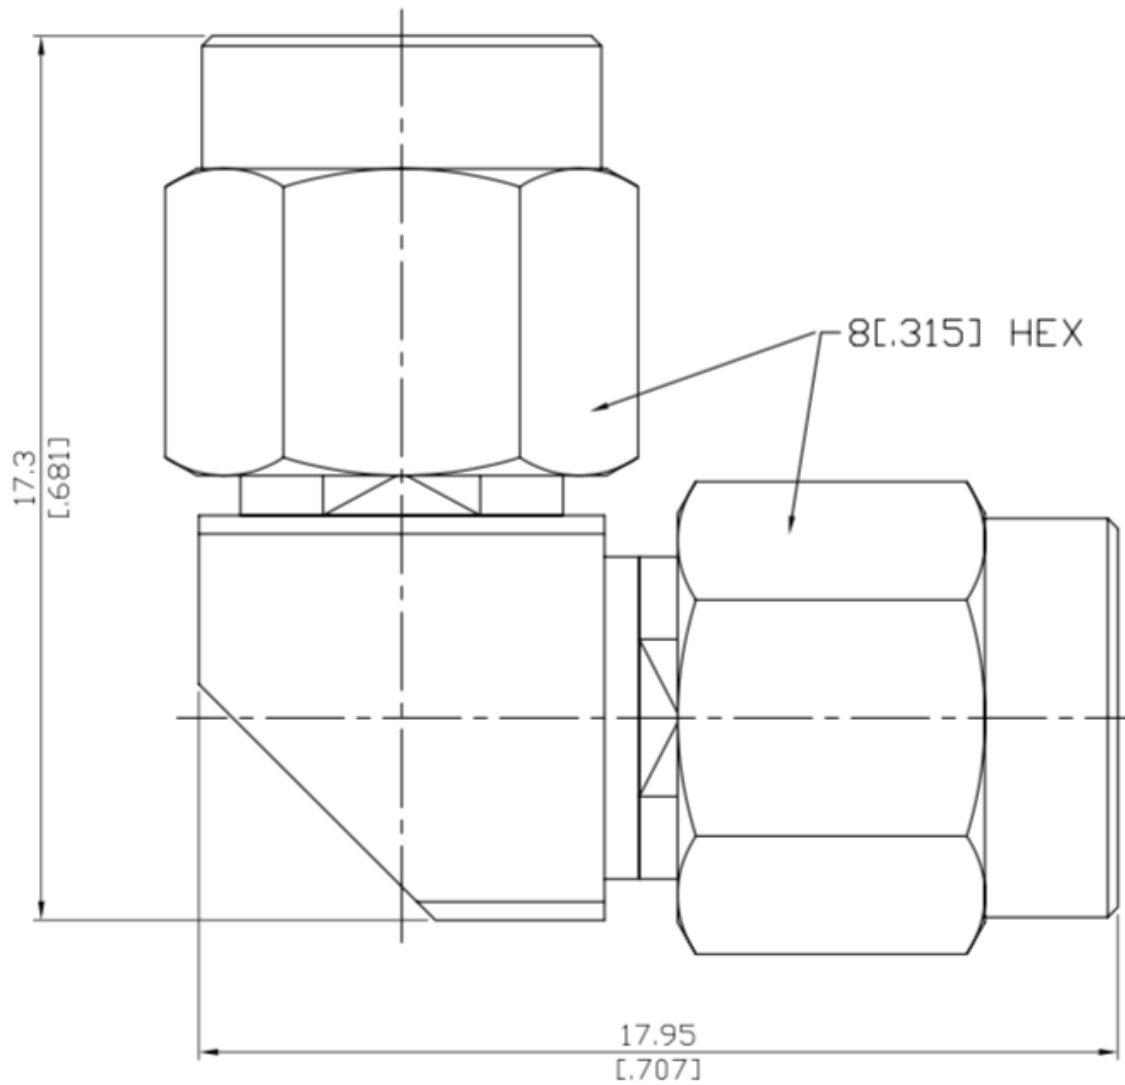

### Product Notes