


Product Features

P1dB's flexible low loss test cable P1CA-24M24M-130F-100CM is a 2.4mm male to 2.4mm male, 1 meter (100 cm) long assembly. Frequency is DC to 50 GHz with a typical Insertion Loss of 3.7 dB for the 100 cm assembly. Typical VSWR to 50 GHz is 1.30.

The flexible 130F cable has an outer diameter of 0.14 inch (3.6mm) and has a Velocity of Propagation of 74%. The cable features 2 shield layers for >90 dB shielding performance. Made with a Low Density PTFE dielectric, typical attenuation at 50 GHz is 1.0 dB/ft.

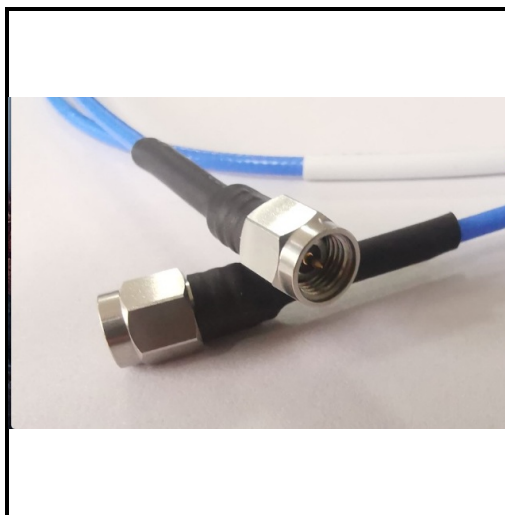


Electrical Specification: T_{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		50.0	

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.4mm Male	
Connector 2	2.4mm Male	
Coax Cable	Flexible, low loss	
Cable Type	130F	
Coax Diameter	0.14	
Minimum Bend Radius	0.7	
Operating Temperature	-55.0 to 125.0 °C	
RoHS Compliance	Yes	


Drawing

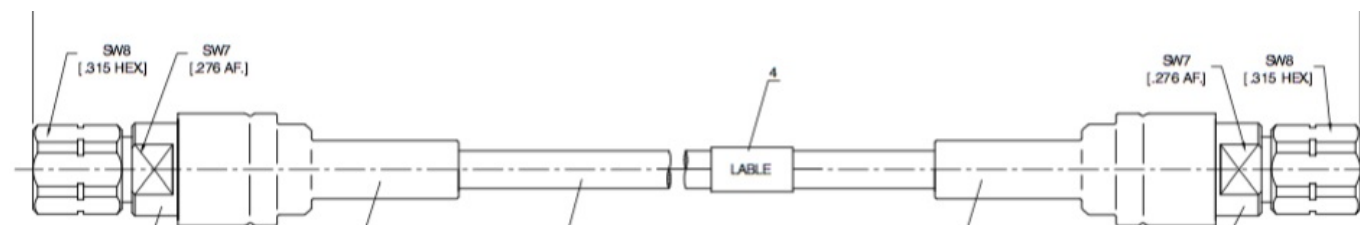

Graph

P1CA-24M24M-130F-100CM

Flexible 50 Ohm cable assembly, 2.4mm male to 2.4mm male, 130F flexible coax, 1 meter (100 cm). Frequency DC to 50 GHz, typical VSWR 1.30.



Frequency(GHz)	Attenuation		Power(Watts CW)
	dB/100 m	dB/100 Ft	
1.0	43.8	13.36	409
2.0	62.2	18.97	288
4.0	88.5	26.99	202
6.0	108.8	33.18	165
8.0	126.1	38.46	142
10.0	141.5	43.16	127
12.0	155.4	47.40	115
14.0	168.3	51.33	106
18.0	191.8	58.50	93
40.0	291.7	88.97	61
50.0	328.5	100.19	55

	Material	Diameter	
		mm	inch
1. Inner Conductor	Silver Plated Copper	0.72	0.028
2. Dielectric	LD PTFE	2.12	0.083
3. Outer Conductor	Spiral Wrapped Silver Plated Copper Tape	2.30	0.091
4. Interlayer	PTFE	2.58	0.102
5. Outer shields	Silver Plated Copper Braid	2.98	0.117
6. Jacket	FEP	3.60	0.142

Electrical Characteristics		
Impedance	50 Ohms	
Velocity of Propagation	74%	
Shielding Effectiveness	> 90 dB	
Operating Frequency (MAX.)	50 GHz	
Dielectric withstanding voltage	1000 VRMS	


Mechanical Characteristics		
Cable Minimum Static Bend Radius	18 mm	.709 inch
Cable Minimum Dynamic Bend Radius	36 mm	1.42 inch
Weight	34 g/m	0.024 lbs/ft

Product Notes

Mating cycles > 500.

P1CA-24M24M-130F-100CM

Flexible 50 Ohm cable assembly, 2.4mm male to 2.4mm male, 130F flexible coax, 1 meter (100 cm). Frequency DC to 50 GHz, typical VSWR 1.30.



Temp range -55 to +125 deg C.

Bend radius is 0.7 inch (18mm).