

# P1CA-29FPT-020SR-2

2.92mm Female to Pigtail (no connector) cable assembly using 020SR Semi-Rigid Coax, 2 inch. RF tested over frequency DC to 40 GHz. Max VSWR 1.45.

### Product Features

P1CA-29FPT-020SR-2 is a high frequency RF Test Probe (Pigtail assembly). The cable assembly is 2.92mm female connector to Pigtail (no connector) using 020SR Semi-Rigid Coax (.020 inch diameter) , 2 inch long. Each assembly is RF tested DC to 40 GHz. Max VSWR 1.45.




### Electrical Specification: T<sub>Ambient</sub> = 25° C

| Parameter       | Frequency Range | Units | Min | Typical | Max | Notes |
|-----------------|-----------------|-------|-----|---------|-----|-------|
| Frequency Range |                 | GHz   | DC  |         | 40  |       |

### Mechanical And Environmental Specifications:

| Parameter       | Description            | Notes |
|-----------------|------------------------|-------|
| Connector 1     | 2.92mm Female          |       |
| Connector 2     | Pigtail - No Connector |       |
| Coax Cable      | Semi-Rigid             |       |
| Cable Type      | 020SR                  |       |
| Coax Diameter   | 0.02                   |       |
| Length          | 2.0                    |       |
| RoHS Compliance | Yes                    |       |

### Drawing

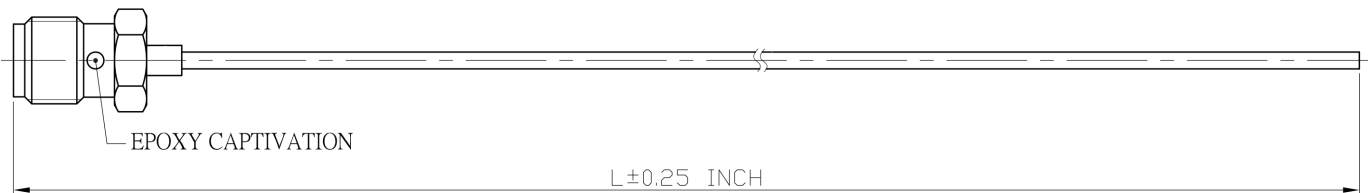

## P1CA-29FPT-020SR-2

2.92mm Female to Pigtail (no connector) cable assembly using 020SR Semi-Rigid Coax, 2 inch. RF tested over frequency DC to 40 GHz. Max VSWR 1.45.

### Product Notes