

P1CA-NMNM-SS141-2M

N Male to N Male test cable using SS141 high performance coax, 2 meters, frequency to 18 GHz.

Product Features

P1CA-NMNM-SS141-2M is a 50 Ohm RF flexible test cable, N male to N male. The cable is SS141 which has an outer diameter of 4.14 mm (0.163 inch). Length is 2 meter. Frequency DC to 18 GHz. VSWR 1.3 max. Insertion Loss 3.7 dB max.



Electrical Specification: T_{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		18.0	


Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	N Male	
Connector 2	N Male	
Coax Cable	High Performance	
Cable Type	SS141	
Coax Diameter	0.163	
RoHS Compliance	Yes	


Drawing

P1CA-NMNM-SS141-2M

N Male to N Male test cable using SS141 high performance coax, 2 meters, frequency to 18 GHz.

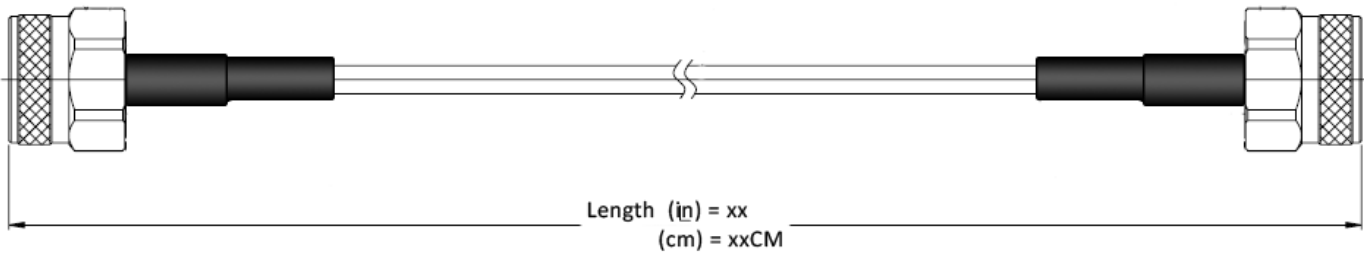

Graph

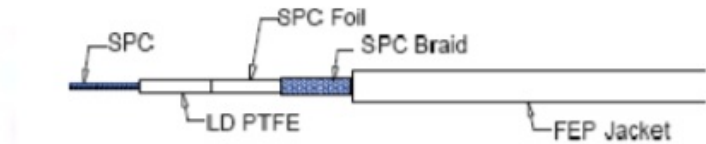

ELECTRICAL CHARACTERISTICS	
Impedance	50±2
Capacitance (Nominal)	
(pF/ft)	29.4
(pF/m)	96.4
Velocity of Propagation (%)	78
Cutt Off Frequency (GHz)	40
Shielding Effectiveness	> -110dB
Max. Attenuation (dB/100Ft)	Attenuation
Max Power (Watts)	Power
	dB/100Ft dB/100M
400MHz	7 23 1100
1GHz	11 36 550
3GHz	18.9 62 350
5GHz	25.3 83 245
10GHz	37.5 123 140
18GHz	51.9 170 87
25GHz	63.5 208 75
30GHz	71.4 234 68
35GHz	78.4 257 61
40GHz	87.8 288 56
MECHANICAL CHARACTERISTICS	
Max. Operating Temperature (°C)	-55/ +200
Min. Bend Radius	Static Dynamic
(inch)	0.48 1.57
(mm)	12 40
Weight	
(g/Ft)	13.5
(g/M)	44.3

P1CA-NMNM-SS141-2M

N Male to N Male test cable using SS141 high performance coax, 2 meters, frequency to 18 GHz.

Product Notes